




# WIRE MESH CATALOG

## CERTIFICATIONS


Member of AISC | AISC Certified | Member of AWS  
HUB - TxCPA | DBE/ACDBE - PANYNJ | MBE - PANYNJ  
SBE - PANYNJ | DBE/ACDBE - TxDOT | SBE - TxDOT  
DBE/ACDBE - Caltrans | MBE - NYC SBS | MBE - NYS  
NJPW Contractor | MBE - NYC SCA | Cage Code - SBA

**SD**<sup>®</sup>  
INDUSTRIES

[www.sd-ind.com](http://www.sd-ind.com)  
212-348-8000  
[sales@sd-ind.com](mailto:sales@sd-ind.com)

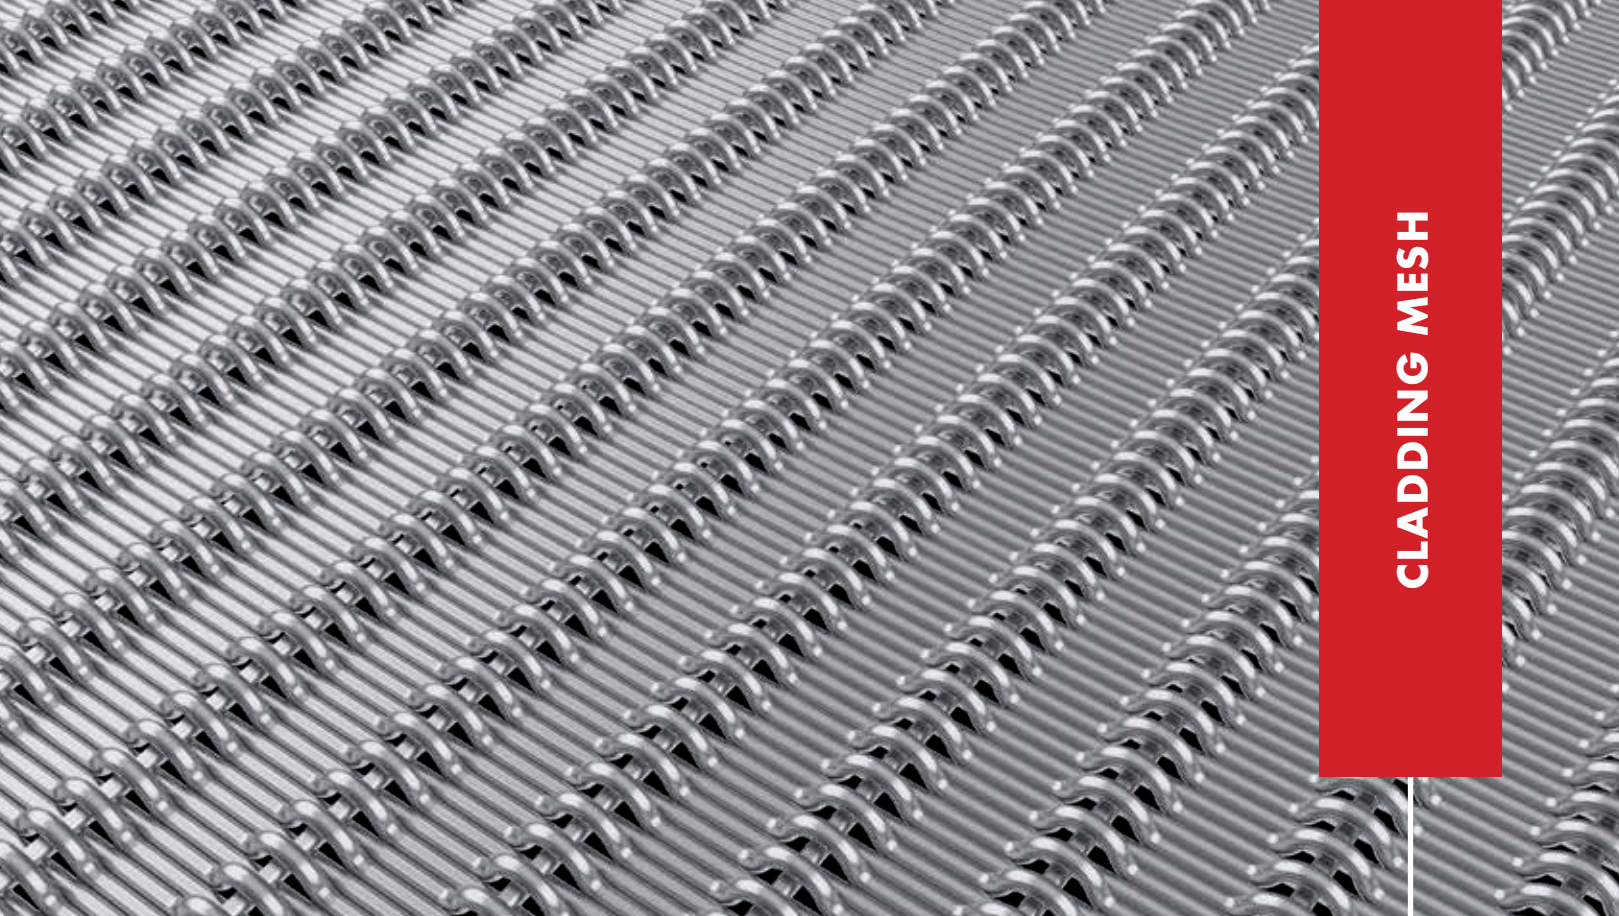

CLADDING MESH

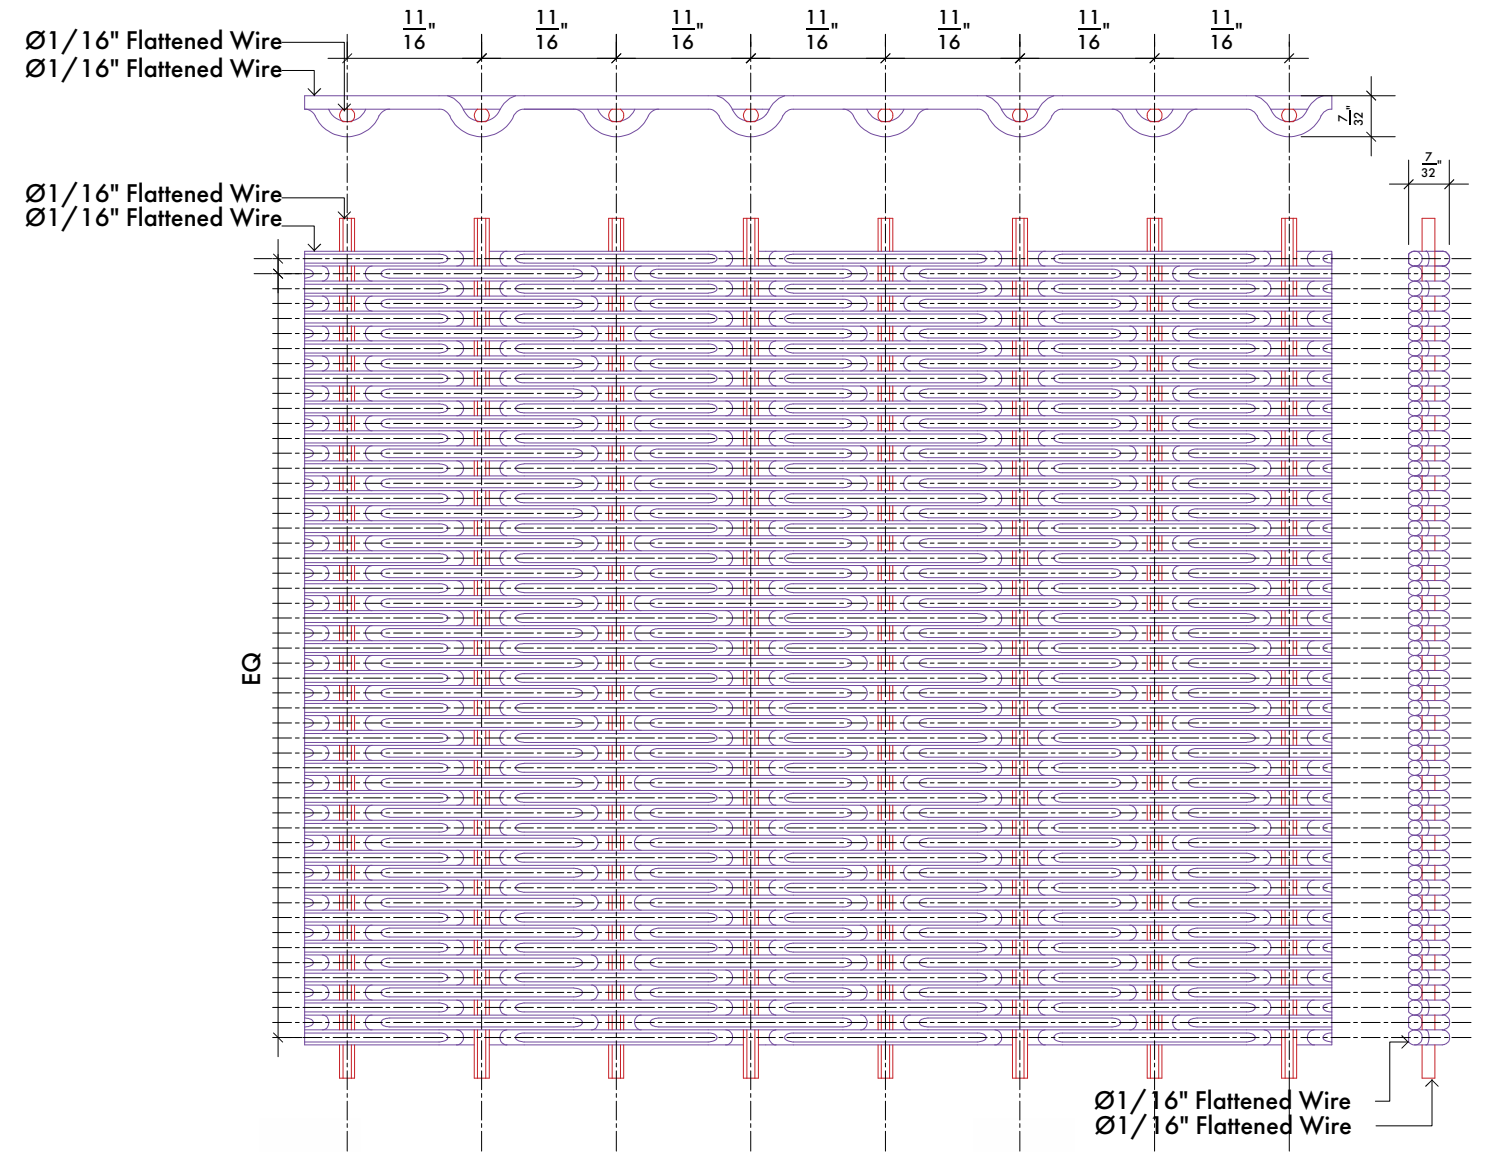


## FACETED OPAQUE WIRE MESH

SDI-C01

C01

The SDI-C01 architectural wire mesh features an opaque weave with embossing technology on flat top cross wires, creating a faceted cladding material. The slight facets produce unique reflective patterns from a near-perpendicular view. This asymmetric mesh is commonly mounted on a rigid backer for vertical and horizontal surfacing, making it ideal for elevators, lobbies, airports, and retail environments.

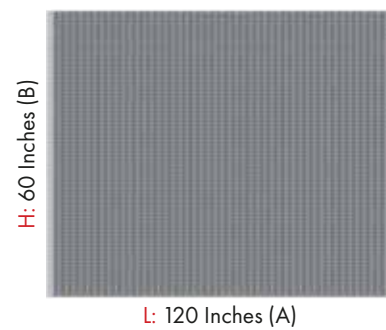

### SPECIFICATIONS

<b>Percentage Open</b> 0.0 %	<b>Overall Thickness</b> 0.206	<b>Crimp Style</b> PDFT-Emboss Lock	<b>Aspect Ratio</b> 10.56:1
<b>Opening Limitation</b> 0.000	<b>Weight</b> 2.36 lbs./sq. ft.	<b>Max Length</b> 120 Inches (A)	<b>Max Height</b> 60 Inches (B)

**Material:**  
Stainless Steel, Brass, Bronze

**Finish:**  
US10A, US10B

